



**LISY - DVOŘÁK**  
wood gluing presses

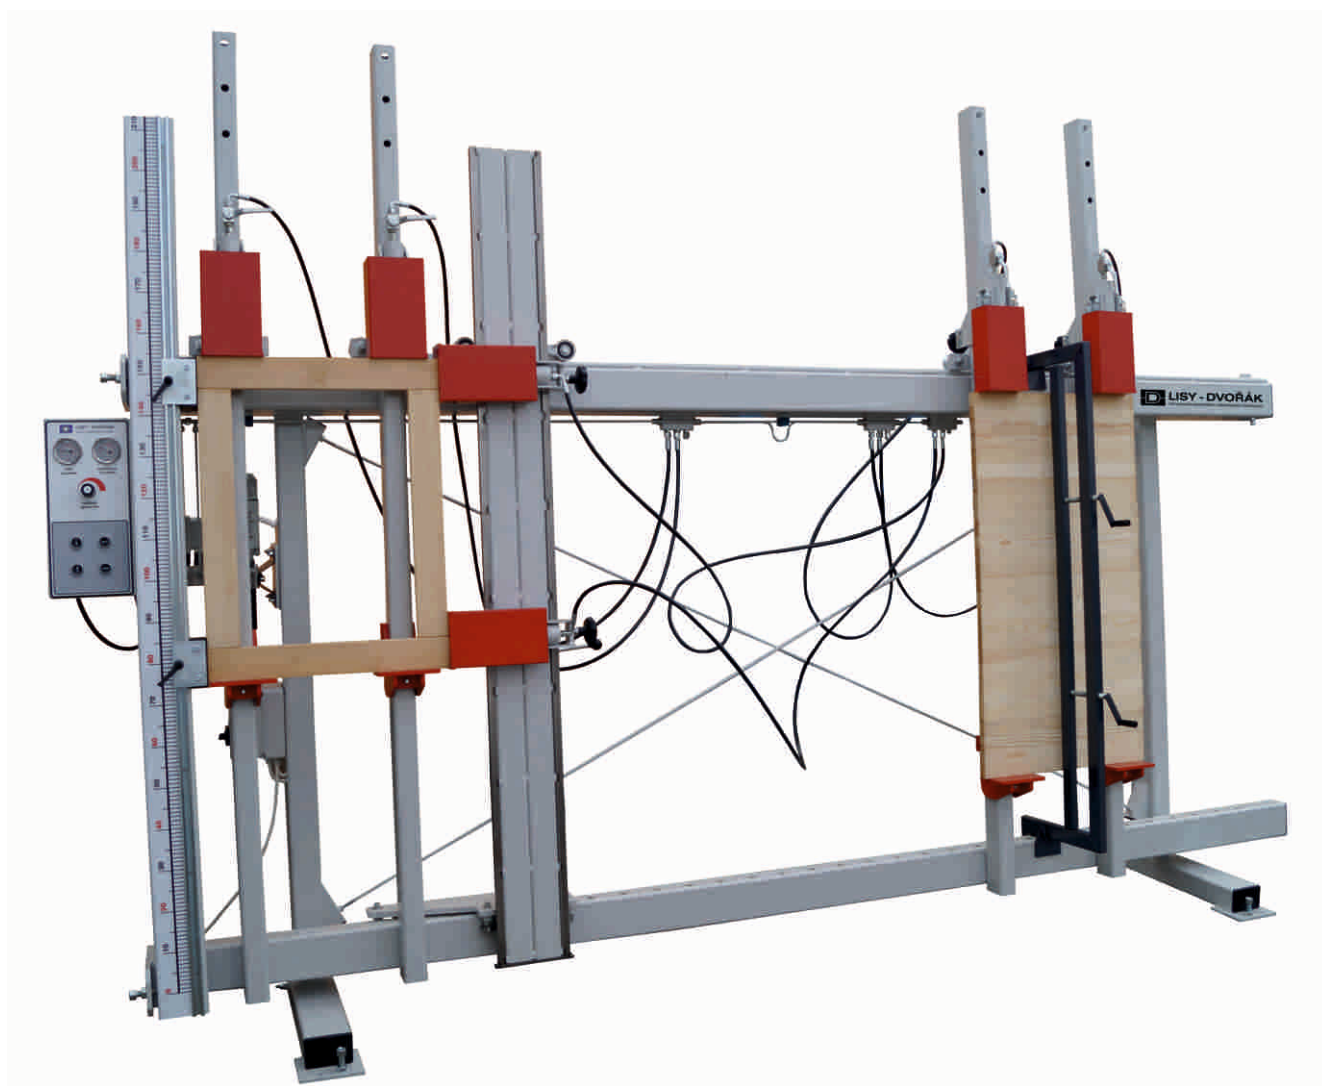

**SLR**  
FRAME PRESS

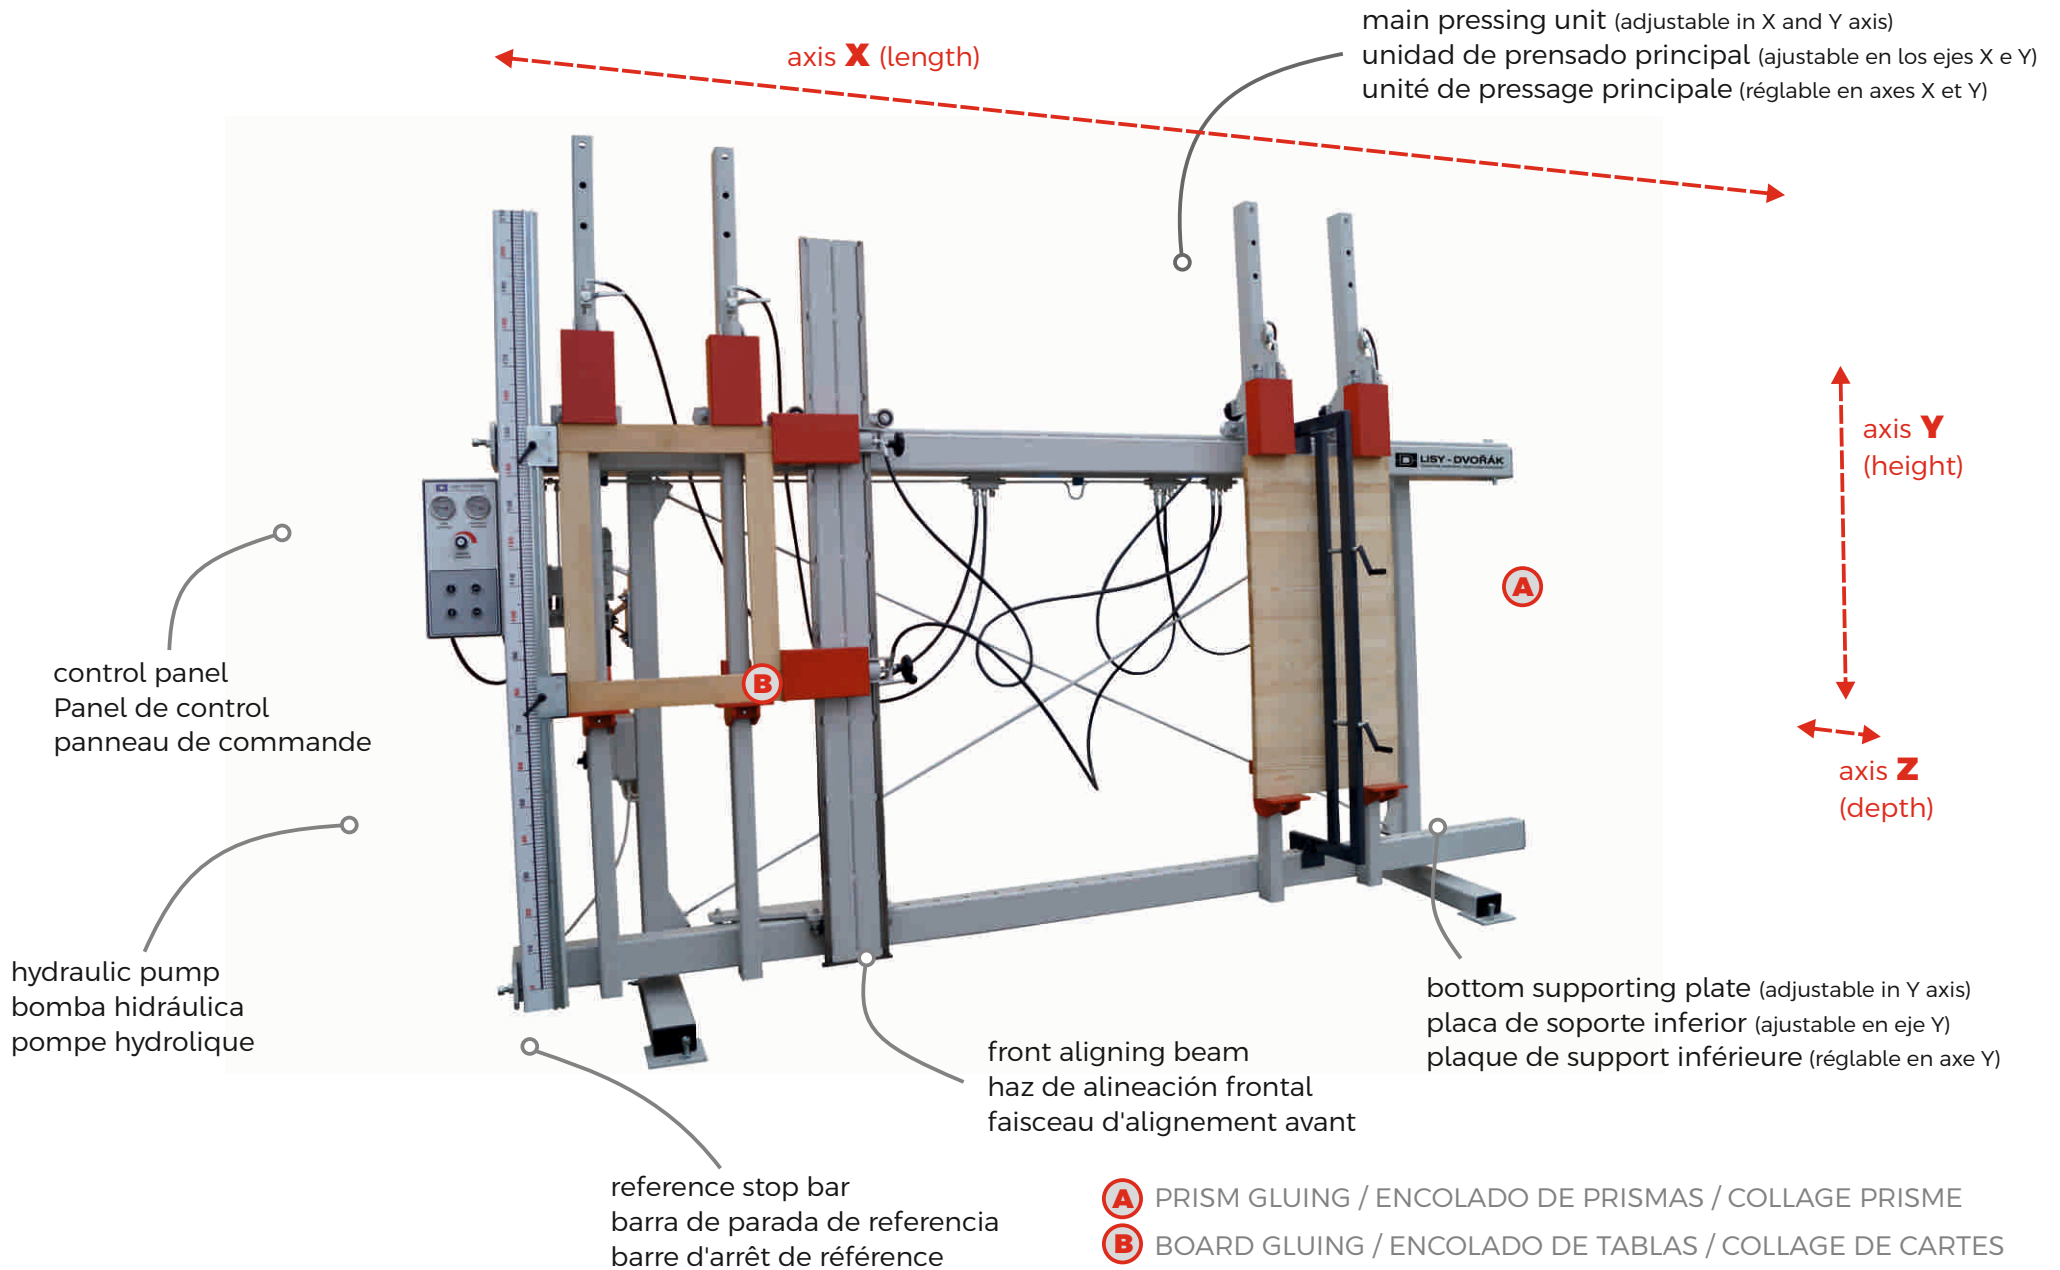

| TECHNICAL PARAMETERS                           | SLR                           |           |
|------------------------------------------------|-------------------------------|-----------|
| overall machine length                         | according the working length  | m         |
| overall machine height                         | 2 580 / 2 880 / 3 280         | mm        |
| overall machine depth (width)                  | 810 / 950                     | mm        |
| machine weight                                 | according the model type      | kg        |
| max. frame gluing length (X axis)              | 2 500 / 3 000 / 3 500 / 4 000 | mm        |
| max. frame gluing height (Y axis)              | 1 800 / 2 100 / 2 500         | mm        |
| max. desk material gluing height (Y axis)      | 1 450                         | mm        |
| max. material thickness / depth (Z axis)       | 90                            | mm        |
| number of vertical pressing units (cylinders)  | 3 - 10                        | pcs       |
| number of side pressing units (cylinders)      | 2 - 3                         | pcs       |
| number of front aligning bars                  | 1 - 8                         | pcs       |
| max. pressing unit force (cylinder pressure)   | 2 000 [20]                    | kg [kN]   |
| max. front aligning bar force (manual - screw) | 300 [0,3]                     | kg [kN]   |
| pressing unit stroke                           | 120                           | mm        |
| electrohydraulic pump power                    | 0,8 - 2,2                     | kW        |
| pressure setting                               | YES, on control panel         | -         |
| max. pressure in hydraulic circuit             | 200                           | bar       |
| hydraulic oil class                            | HM46                          | 12 liters |
| voltage                                        | 3x 400V / 50 Hz               | -         |

\* machine equipment can be modified by client requirements individually

**LISY - DVOŘÁK, s.r.o.**

Kňovická 344

264 01 Sedlčany, Czech Republic

e-mail: [info@lisy-dvorak.cz](mailto:info@lisy-dvorak.cz)

web: [www.lisy-dvorak.cz](http://www.lisy-dvorak.cz)

GSM: **00420 732 240 341**

GSM: **00420 736 645 159**



<https://www.instagram.com/lisydvorak/>



<https://www.facebook.com/lisydvorak/>



<https://www.youtube.com/channel/UCz8HvcZz27siCo0CnglizOQ>